

AUDIOFLOW DRIVER FOR CRESTRON HOME

Revision: 1.0.0

Date: 06 June 2024

LICENCING

Please visit shop.ultamation.com and then navigate to "Crestron Home" > "AV Switcher" > "Audioflow AV Switcher For Crestron Home" to obtain a licence key for your Crestron processor.

SUPPORTED INSTALLATION

The driver is designed to integrate Audioflow 3S speaker switch devices via IP control.

MODULE DESCRIPTION

The driver provides control of Audioflow 3S speaker switches via the Crestron Home AV switching integration.

Each switch to be controlled will require a separate definition using the driver, but the same licence key can be used for multiple switches on a single processor.

After importing the driver (see the general "How to" document), the switcher will be found under:

Devices > AV Switcher > Audioflow

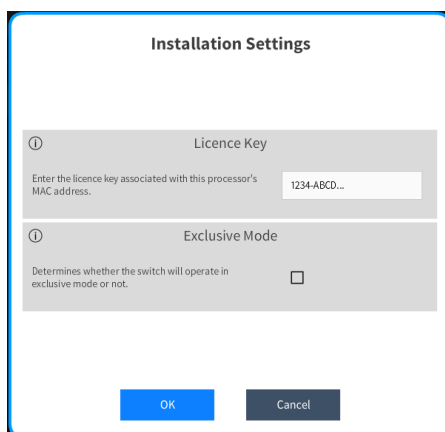
Adding the Switch

Ensure a room is selected, and then click on the '+' against the appropriate device.

You will be asked to provide a descriptive name for the switcher – this can be anything you wish. You will also need to specify the IP address for the switcher. The IP control port should be left at 80, and leave "Requires Authentication" unchecked.

There is then an option to enable or disable exclusive mode. Enabling this ensures that only one output can be active at a time.

The device will be added to your system, and you will be asked to enter a licence key to ensure that the integration will function after the initial one-hour trial period.

The image shows a screenshot of a software window titled "Installation Settings". It contains two main sections. The first section, "Licence Key", has a text input field with the placeholder "1234-ABCD..." and a small icon of a document with a checkmark. The second section, "Exclusive Mode", has a checkbox that is currently unchecked and a small icon of a document with a checkmark. At the bottom of the window are two buttons: "OK" and "Cancel".

The licence key will be emailed to you with your order acknowledgement. The same key can be used for multiple switcher instances in the same system (though different Crestron Home systems will require different licence keys). If you do not enter a valid licence key here, the system will function for 1 hour and then Audioflow control will be suspended. The licence key can be entered at any time after initial setup without having to reconfigure each tile.

Once added, the switcher will be available within the Source Route configuration within Crestron Home. Simply assign your existing sources to the inputs, and display/audio devices to outputs.

When you select a source for a zone, the module will send the appropriate switching commands to the Audioflow switch. Switching can be verified via the Audioflow mobile application.

Note: Whilst this module provides 4 outputs it can also be used for models with less than 4 zones, leaving the additional outputs blank within Crestron Home Setup.

SUPPORT

If you have any issues with a driver or installation please let us know by contacting Ultamation support on support@ultamation.com and please include as much detail about your issue as possible, such a recent processor error log.

Licence verification messages are posted to the error log, so please ensure you have checked this.

LICENCE

This module (including software, images and any and all other associated assets distributed as part of the purchased download package) is licenced on a PER PROCESSOR basis.

A licence key is generated at the point of purchase and is linked at that time to specific information that MUST be provided at the time of purchase. A purchase should not be completed without correct information as refunds cannot be issued for errors or changes made to details following purchase.

The licence key for each device will be delivered via email along with links to download the module. There is no physical delivery.

The module is provided without any warranty with respect to the reliability of the controlled device or changes to device protocol. We will endeavour, through best efforts, to maintain the module's functionality and any bug fixes will be provided free-of-charge. Additional functionality may be released as a variation of this module and this will be a separate, purchasable, product.